

23G Series RO

Reverse Osmosis System 3,000 to 16,500 GPD

Hemodialysis providers and patients around the world depend on the 23G reverse osmosis system for push button simplicity and reliability. The 23G Series RO is designed and tested to meet AAMI grade water standards according to ANSI/AAMI 13959 for RO product water.

Standard Features

- Quiet TEFC high efficiency pump
- Free standing design makes installation and maintenance easy
- Auto inlet shut-off valve
- Autoflush system
- Unique expandable frame to increase output
- Adjustable Flow Block
- Quality tested spiral wound elements
- Quick-connect permeate manifold service ports
- Centralized, user friendly monitoring panel
- Permeate divert to ensure high quality product
- Chemically compatible with 1% Minncare® Cold Sterilant disinfectant solution
- Remote Alarm
- Set of Locking casters

Operating Parameters

- Recovery: 50-75%
- Control Voltage: 115 VAC 60 Hz; 220 VAC 50 Hz Single-Phase
- Motor Voltage: 208/230, 460 VAC 60 Hz; 220, 380 VAC 50 Hz 3-Phase
- Membrane: HR (PA) Thin Film Composite
- Rejection Ionic: 95-98% (Assumes typical water with mono & polyvalent salt mix)
- Connections: 1-inch (2.5 cm) FNPT
- Materials: All Wetted Materials are Stainless Steel or Inert Plastic

510(k) Medical Device



ECM-100 Controller

- System Status Lights: Run, alarm, permeate divert, status lights and auxiliary lights
- Alarm Message Center: Alarm messages, maintenance reminders, interfaces with system operations and displays date and time
- RO operating data
- High-contrast LCD module with LED backlighting
- User-adjustable alarm limits and timers

Available Options

- Chemical feed system
- Clean-In-Place (CIP)
- pH monitor
- Expansion kits
- Single-Phase motor

Technical Data


23G Series RO Specifications										
Standard Model@ 77°F (25°C)										
Capacity - gpd	3,000 ¹	4,500 ¹	6,000	7,500 2	9,000	10,500	12,000	13,500	15,000	16,500
Capacity - m3/d	11.4	17.1	22.7	8.4	34.1	39.8	45.5	51.2	56.9	62.5
Power - hp	5	5	5	5	5	7.5	7.5	7.5	7.5	7.5
Power - kw	3.7	3.7	3.7	3.7	3.7	5.6	5.6	5.6	5.6	5.6
¹ 50% Recovery Available Only										

Feedwater Requirements

Free Chlorine Level	(Min.) 0.0 ppm (mg/L)	(Max.) <0.1 ppm (mg/L)
pH	(Min.) 5.8	(Max.) 10.0
Pressure	(Min.) 20 PSI (1.4 bar)	(Max.) 60 PSI (4.1 bar)
Temperature	(Min.) 35°F (2°C)	(Max.) 85°F (29°C)

- Langelier Saturation Index (LSI) as calculated on concentrate total dissolved solids (TDS) must be negative.
- Permeate flows vary with temperature; all model capacities nominally rated at 77°F (25°C).

The 23G At A Glance

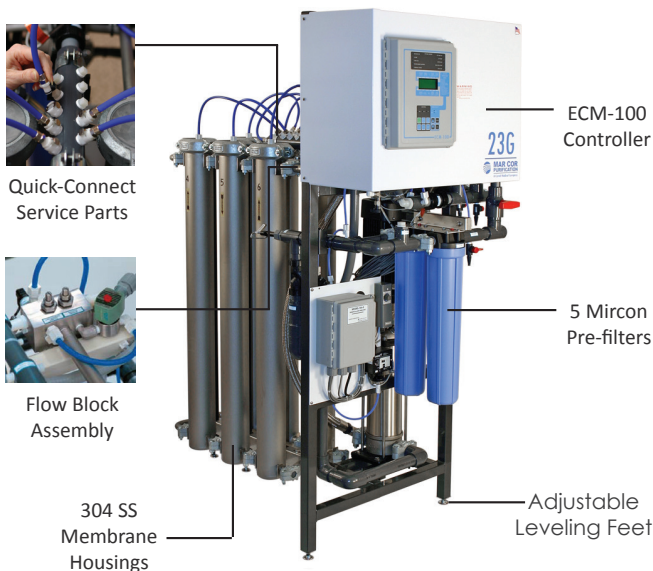

Self-Diagnostics

At the heart of the 23G RO System is the ECM-100. This solid state controller / monitor is user-friendly. The liquid crystal display (LCD) makes it easy to see operating parameters.



Everything is conveniently displayed in one easy-to-find location. The unique Alarm Message Center identifies individual alarms and helps facilitate corrective action.



Mar Cor Purification
4450 Township Line Road
Skipack, PA 19474-1429
Tel: (484) 991-0220
Toll Free: (800) 346-0365
Fax: (484) 991-0230

Mar Cor Purification
14550 28th Avenue North
Plymouth, MN 55447
Tel: (484) 991-0220
Toll Free: (800) 633-3080
Fax: (763) 210-3868

Mar Cor Purification
3250 Harvester Road - Unit 6
Burlington, ON L7N 3W9
Tel: (905) 639-7025
Toll Free: (800) 268-5035
Fax: (905) 639-0425

Mar Cor Purification
Sourethweg 11
6422 PC Heerlen
The Netherlands
Tel: (+31) 45 5471 471
Fax: (+31) 45 5429 695

Mar Cor Purification
1A International
Business Park, #05-01
Singapore 609933
Tel: (+65) 6227 9698
Fax: (+65) 6225 6848